




ENCLOSED TRACK CONVEYORS


ISO 9001
PACLINETM
OVERHEAD CONVEYORS
www.pacline.com

PAC-MAXTM
Heavy Duty Conveyor

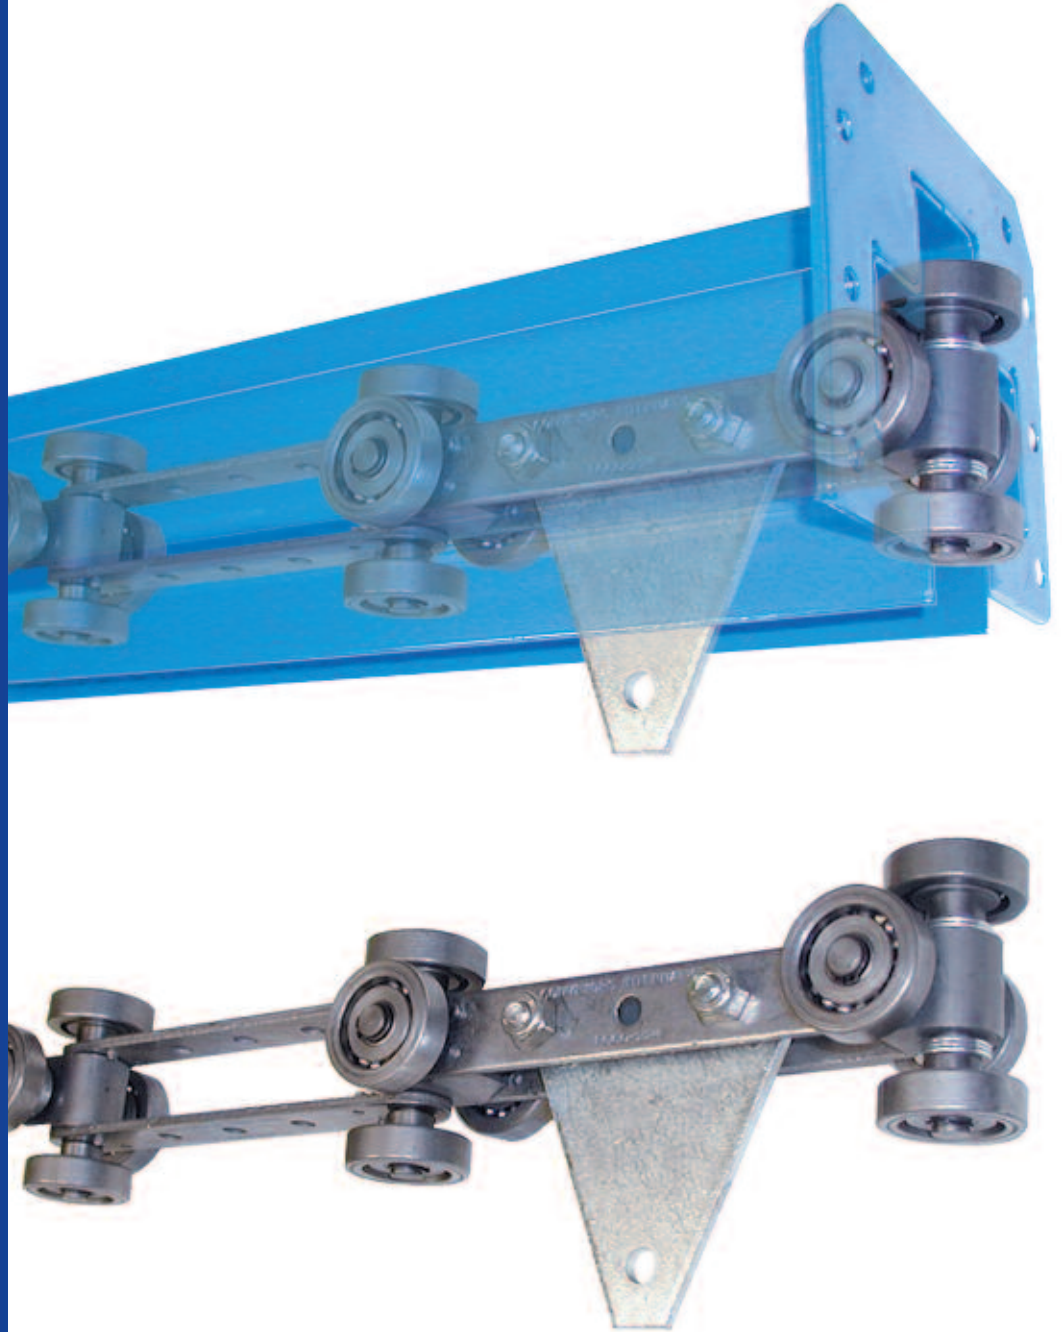

- **COMPACT AND STABLE**
- **HIGH CAPACITY**
- **USE INVERTED OR SIDELOADED**
- **MODULAR COMPONENTS**
- **BOLTED ASSEMBLY**

Model S60

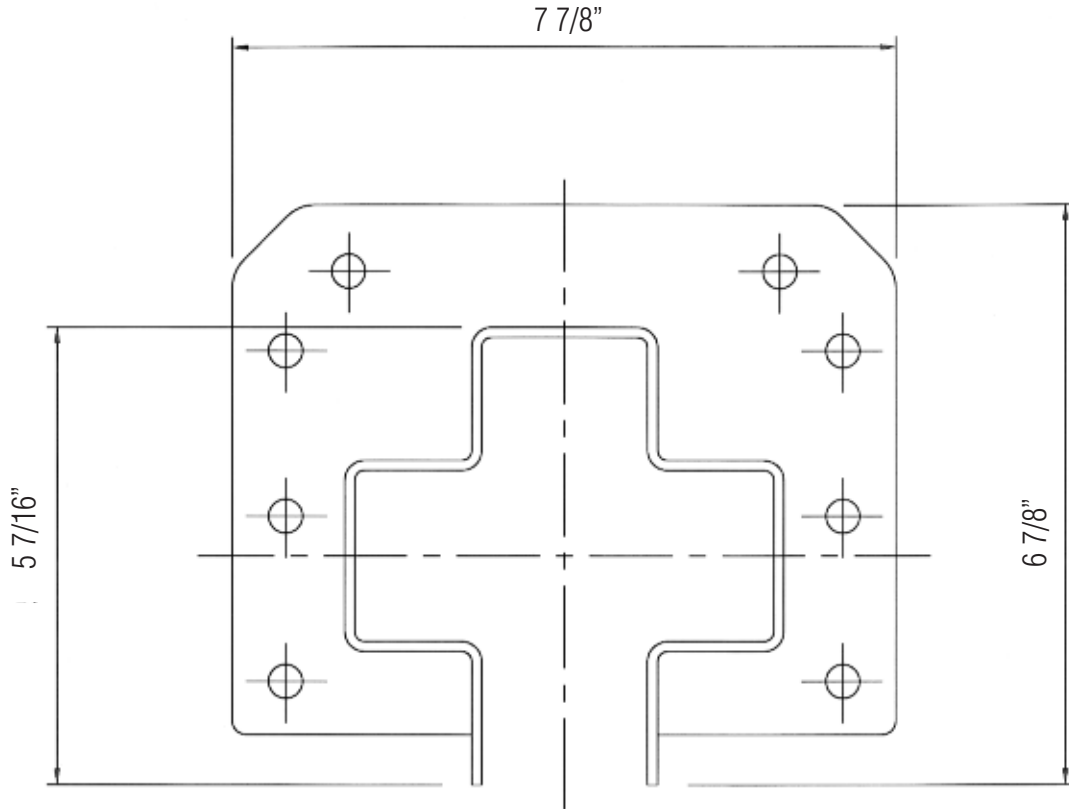

	S60
Maximum Load Per Pendant	200 lbs.
Maximum Drive Pull	2,000 lbs.
Chain Breaking Load	15,000 lbs.
Max Chain Length Per Drive	1,000 ft.
Chain Friction Co-efficient	2.5%
Pendant Centers	16 inches
Minimum Horizontal Curve Radius	30 inches
Minimum Vertical Curve Radius	48 inches
Maximum Drive Speed	45 F.P.M.
Maximum Incline Angle	90 degrees
Capable for Inverted or Sideloaded*	yes

* Load capacity is derated for inverted / sideloaded orientation

www.pacline.com • email: sales@pacline.com

CANADA/INT'L. SALES:

PACLINE CORPORATION

5890 Shawson Drive • Mississauga ON • L4W 3W5

Tel: 905.858.2330 • Fax: 905.858.2333

U.S.A. SALES:

PACLINE CONVEYORS, INC.

155 Great Arrow Ave • Buffalo • New York • 14207

Tel: 716.876.9250 • Fax: 716.876.9287