


Model S60 Enclosed Track Overhead Conveyor

# ENCLOSED TRACK CONVEYORS

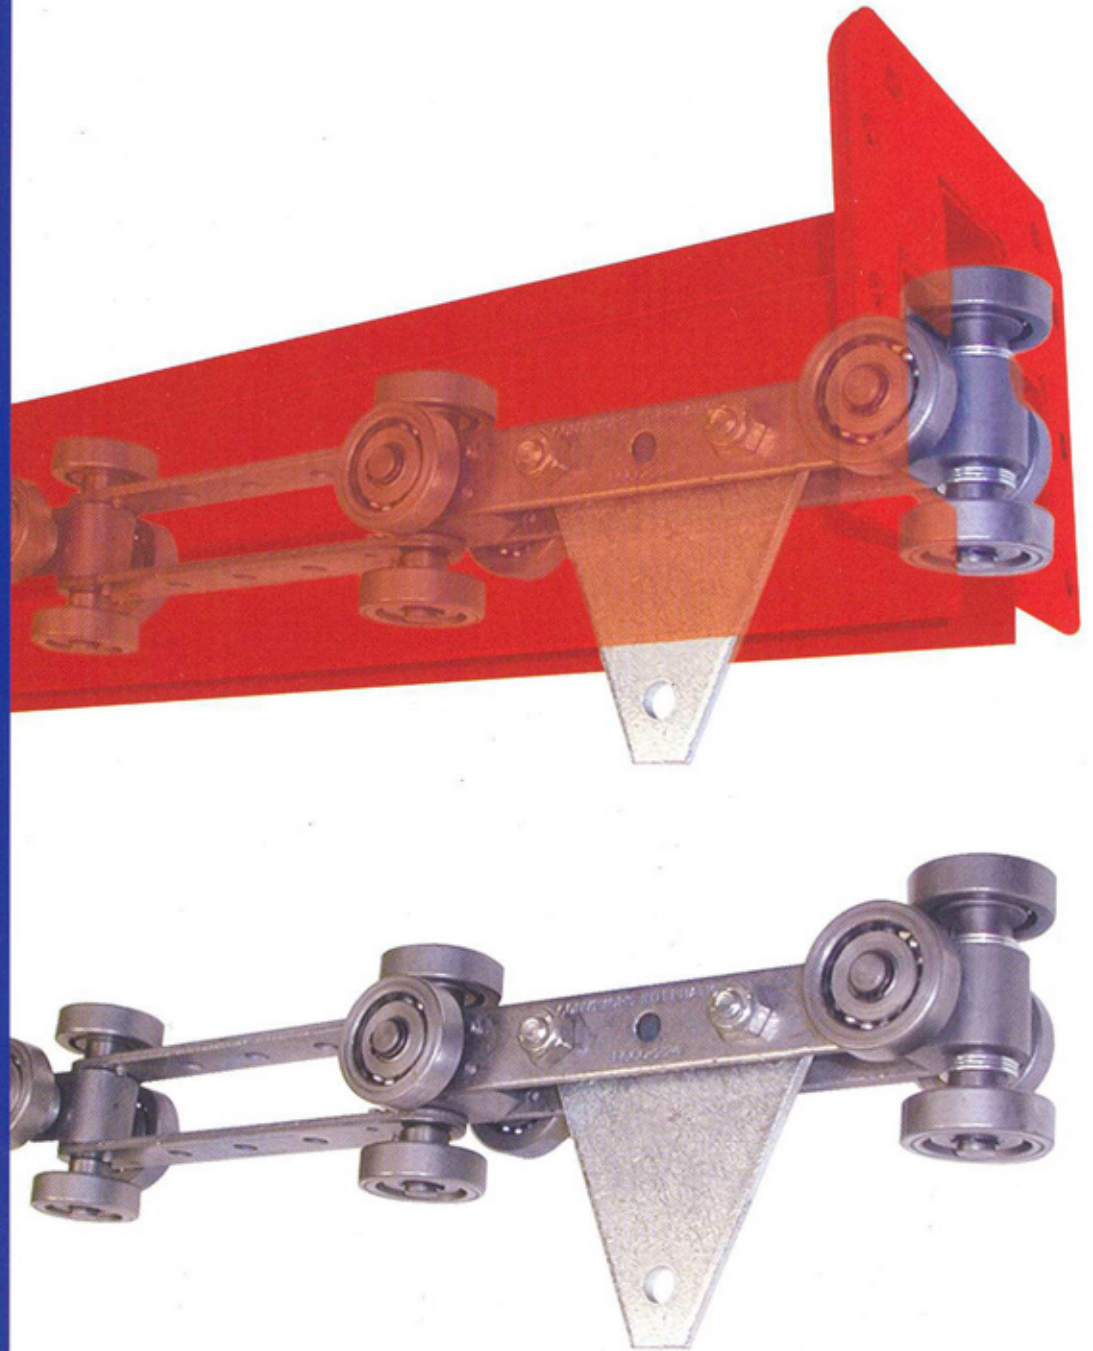


- COMPACT AND STABLE
- HIGH CAPACITY
- USE INVERTED OR SIDELOADED
- MODULAR COMPONENTS
- BOLTED ASSEMBLY

ISO 9001  
**PACLIN**<sup>TM</sup>  
OVERHEAD CONVEYORS  
[www.pacline.com](http://www.pacline.com)

# ENCLOSED TRACK CONVEYORS

ISO 9001  
**PACLINE**<sup>TM</sup>  
OVERHEAD CONVEYORS

## Model S60

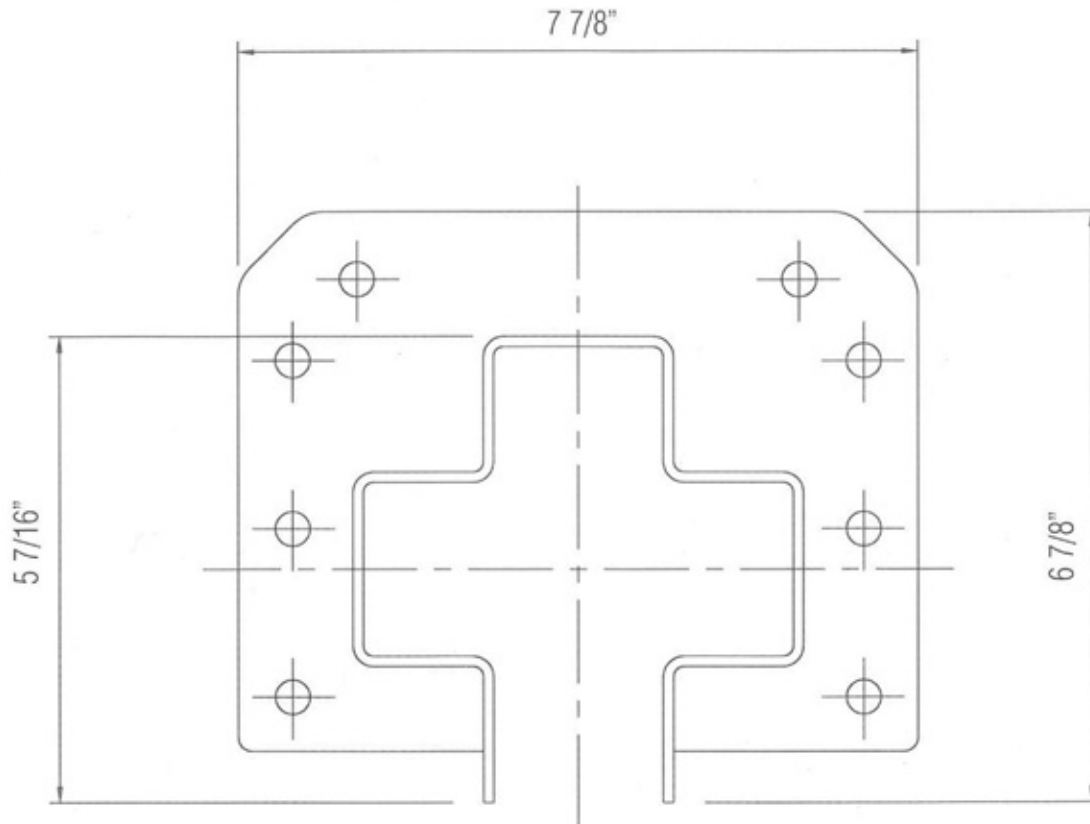

	<b>S60</b>
Maximum Load Per Pendant	200 lbs.
Maximum Drive Pull	2,000 lbs.
Chain Breaking Load	15,000 lbs.
Max Chain Length Per Drive	1,000 ft.
Chain Friction Co-efficient	2.5%
Pendant Centers	16 inches
Minimum Horizontal Curve Radius	30 inches
Minimum Vertical Curve Radius	48 inches
Maximum Drive Speed	45 F.P.M.
Maximum Incline Angle	90 degrees
Capable for Inverted or Sideloaded*	yes

\* Load capacity is derated for inverted / sideloaded orientation

[www.pacline.com](http://www.pacline.com) • [email: sales@pacline.com](mailto:sales@pacline.com)

CANADA/INT'L. SALES:

**PACLINE CORPORATION**

10 Falconer Drive • Mississauga • Ontario • L5N 3L8

Tel: 905.858.2330 • Fax: 905.858.2333

U.S.A. SALES:

**PACLINE CONVEYORS, INC.**

155 Great Arrow Ave • Buffalo • New York • 14207

Tel: 716.876.9250 • Fax: 716.876.9287