

PAC-BEAM™


PAGLINE HEAVY LOAD CONVEYOR



- Rugged Construction
- High Capacity
- Durable, Simple and Proven
- Inexpensive Solution


PACLINE™
OVERHEAD CONVEYORS
WWW.PACLINE.COM

Trolley Size	6"	4"		3"	
Drop	10"	8"	7 3/16"	5 1/2"	
Single Trolley Capacity	1200 lbs	400 lbs		200 lbs	
Capacity with Load Bar	2400 lbs	800 lbs		400 lbs	
Trolley Set Wt.	19.3 lbs	6.5 lbs		3.1 lbs	
Chain Size	X-678	X-458		X-348	
I-Beam Size #/ft	6" I @ 12.5	4" I @ 7.7		3" I @ 5.7	
Trolley Dimensions	A	4 13/16"	3 3/16"	3 3/16"	2 5/16"
	B	1/2"	3/8"	3/8"	1/4"
	C	1 5/8"	1 5/16"	1 5/16"	1"
	D	1 1/8"	13/16"	13/16"	7/8"
	E	1 11/16"	1 1/4"	1 1/4"	1 1/4"
	F	3 3/8"	2 1/8"	2 1/8"	1 9/16"
	G	6 3/8"	5 3/8"	5 3/8"	4 1/16"
	H	2 11/16"	1 7/8"	1 7/8"	1 7/16"
	I	2 3/8"	2 11/16"	1 7/8"	1 1/2"

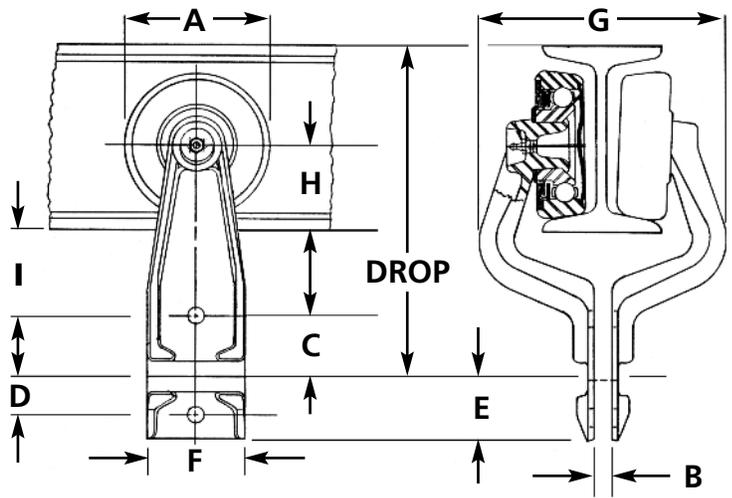


Chain Size	6"	4"	3"	
Part Number	X-678	X-458	X-348	
Ultimate Strength (lbs)	85,000	48,000	24,000	
Weight per Foot (lbs)	6.7	3.2	2.2	
Chain Pull	Maximum	6,500	3,500	2,000
	Recommended	4,500	2,500	1,500
Vertical Curve	12"	10 ft.	5 ft.	
	16"		8 ft.	
Minimum Radius (ft)	18"		6 ft.	
	24"	15 ft.	10 ft.	8 ft.
Trolley Spacing (inches)	30"		10 ft.	
	32"		12 ft.	
Horizontal Turns	36"	20 ft.		
	Roller Lt. C.P.	36" Rad.	18" Rad.	18" Rad.
Minimum Radius	Roller Max. C.P.	48" Rad.	24" Rad.	18" Rad.
	Wheel Lt. C.P.	36" Dia.	24" Dia.	24" Dia.
Radius	Wheel Max. C.P.	48" Dia.	36" Dia.	24" Dia.

X-Type Rivetless (6", 4", 3")

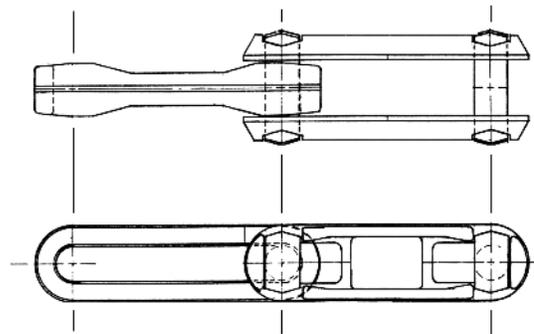


TROLLEY ATTACHMENTS


"H" Attachment



"I" Attachment



"C" Attachment



"B" Attachment

